


TYPE T090


- (D) Montageanleitung
- (GB) Assebly Instructions
- (F) Instructions de montage
- (I) Instruzione di montaggio
- (E) Instrucciones de montage
- (H) Szerelési utasítás
- (NL) Montageaanwijzing

© Copyright by PMA 08/06 852 260




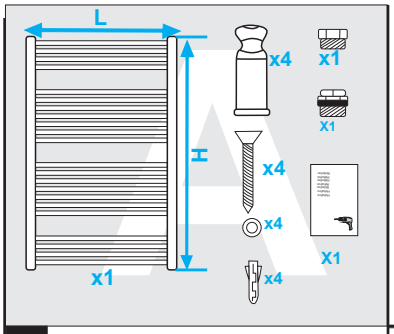

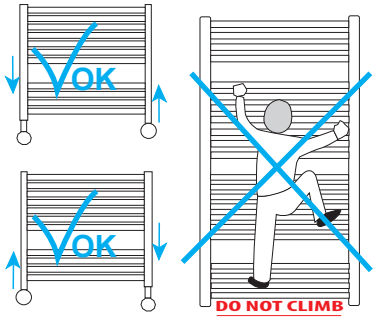


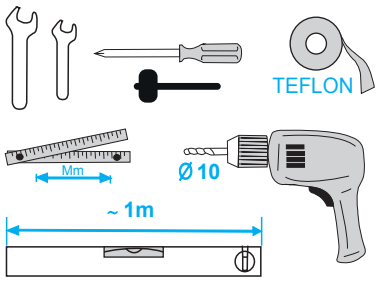




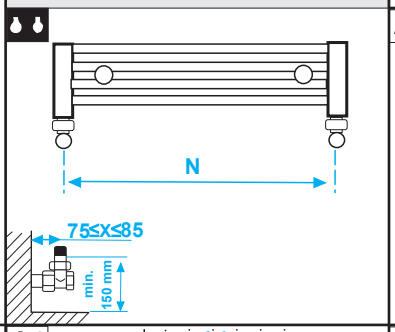


A1




A2




A3




A4




A5

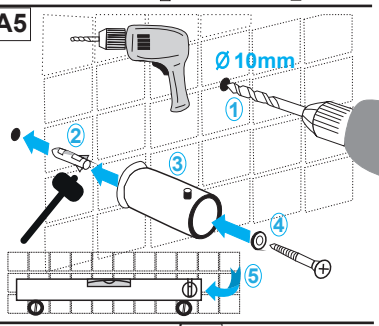


A6

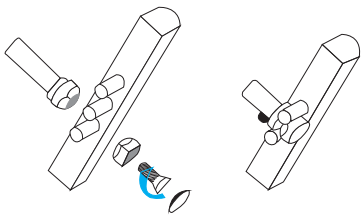


A7





A8




A9

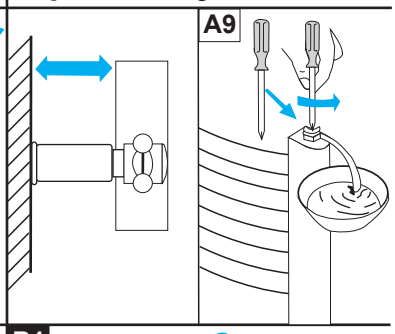


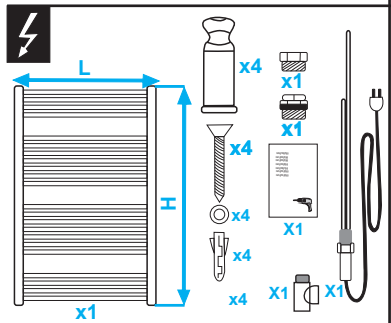

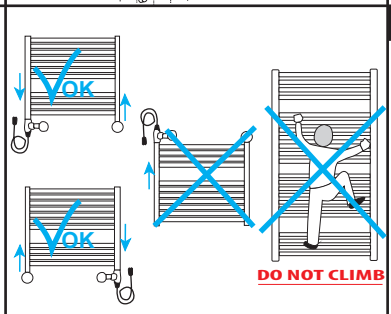


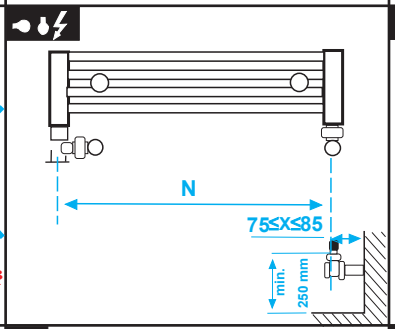


B1




B2

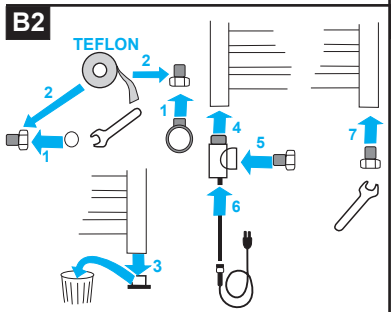


B3




B4




B5

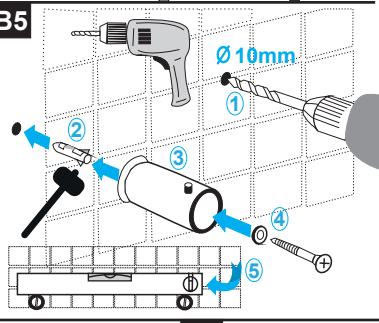


B6

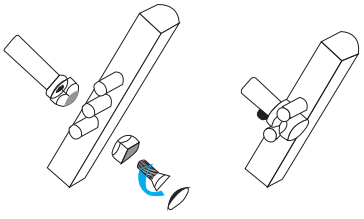


B7




B8



B9

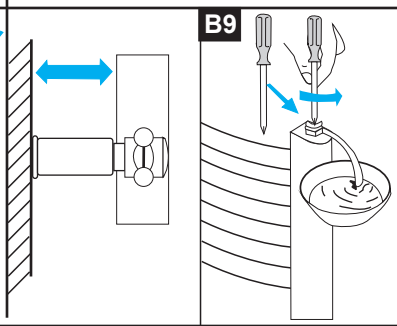

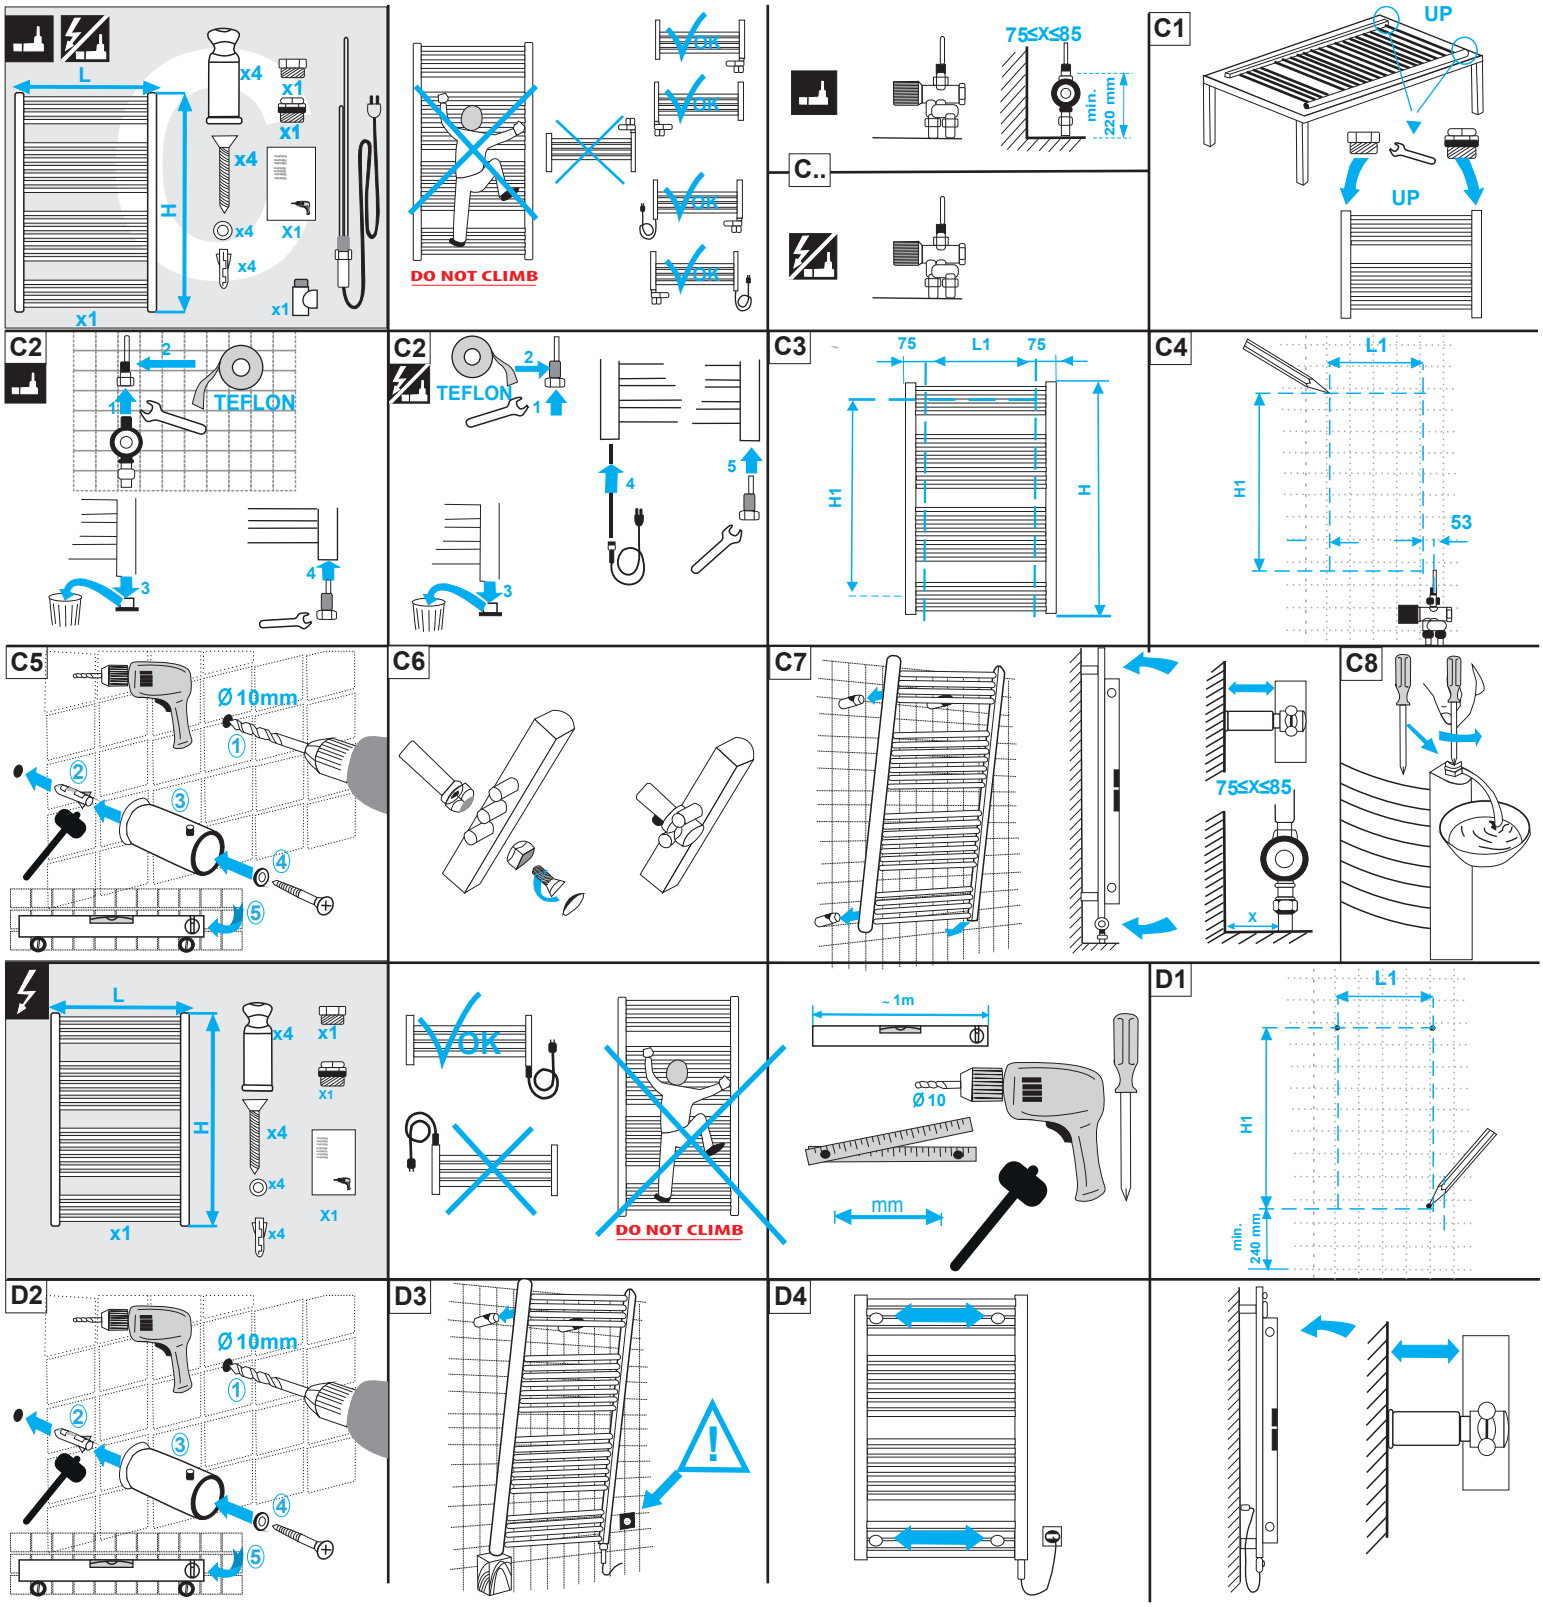

- If a colored radiator is dirty due to transport, warehousing or installation, the surface of the radiator should be cleaned with cold or luke warm water. For persistent marks, a neutral or low alkaline cleaner can be used.
- Further cleaning can be achieved by using soft, non-abrasive cloths or rags.
- The surface temperature of the radiator must not be higher than 25 ºC during the cleaning process.
- The maximum temperature for the detergent is 25 ºC. Do not use steam jet appliances.
- Do not use scraping or abrasive devices. Only use soft cloths for cleaning. Vigorous rubbing is to be avoided.
- Do not use acid or alkaline detergents or wetting agents.
- Do not use organic dissolving agents containing ester, ketone, alcohol, aromatics, glycol ether, halogenated hydrocarbons or other similar products.
- Do not use detergents with unknown compounds.
- Rinse with clear, cold water immediately after cleaning.

H	H_1
607	420
775	588
1217	1008
1469	1260
1856	1680

L	L_1	N
400	250	355
450	300	405
500	350	455
550	400	505
600	450	555
750	600	705

